


---

Navigation and Ancillary Information Facility

# Using Module Headers

January 2018

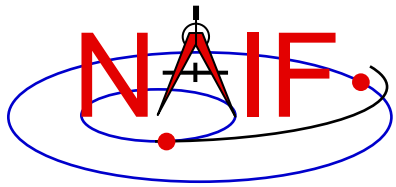


# Topics

---

Navigation and Ancillary Information Facility

- **Module\* Header Purpose**
- **FORTRAN Module Header Locations**
- **C Module Header Locations**
- **Icy Module Header Locations**
- **Mice Module Header Locations**
- **Examine a Typical Header**

\* “Module” = API, routine, subroutine, procedure, function

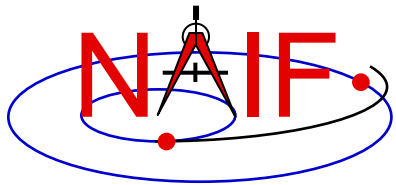


# Module Header Purpose

---

Navigation and Ancillary Information Facility

- **NAIF uses module “headers” to provide detailed information describing how to use the module**
  - In FORTRAN, C and MATLAB Toolkits the “headers” are comment blocks inserted in the source code
  - In IDL Toolkits, where there are (currently) no source code files, the “headers” exist as independent files
- **All Toolkit distributions include plain text and HTML versions of the module headers.**
  - Using the HTML version is usually the best approach because they are hyperlinked with other NAIF documentation
- **The next charts provide the header locations**

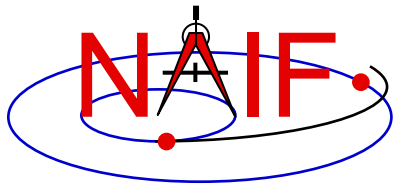

# Fortran Module Header Locations

---


Navigation and Ancillary Information Facility

- **Plain text versions:**

- **<path to SPICELIB>/toolkit/src/spicelib/<name.f or <name>.for**
- In most cases there is a single “header” at the top of the source code. For cases where a FORTRAN module has multiple entry points, there are additional “headers” at each entry point. For example:
  - » “keeper.f” has entries for:
    - FURNISH, KTOTAL, KINFO, KDATA, KCLEAR, and UNLOAD

- **HTML versions:**

- **<path to SPICELIB>/toolkit/doc/html/spicelib/index.html**

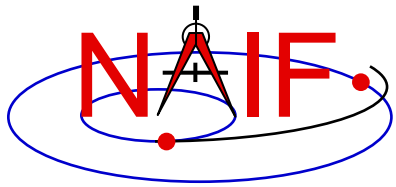


# C Module Header Locations

---

Navigation and Ancillary Information Facility


- **Plain text versions:**
  - **<path to CSPICE>/cspice/src/cspice/<name>\_c.c**
- **HTML versions:**
  - **<path to CSPICE>/cspice/doc/html/cspice/index.html**

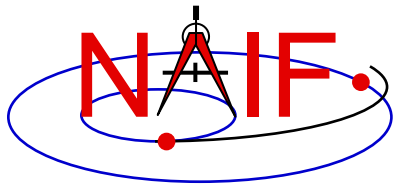

# IDL Module Header Locations

Navigation and Ancillary Information Facility

- **Two sets of headers are provided**
  - Icy headers in HTML format:
    - » `<path to icy>/icy/doc/html/icy/index.html`
  - CSPICE headers, in text and HTML formats:
    - » `<path to icy>/icy/src/cspice/<name>_c.c`
    - » `<path to icy>/icy/doc/html/cspice/index.html`
- **The information provided in an “Icy” header is minimal in some cases; the corresponding CSPICE header provides more detail**
  - A link to the corresponding CSPICE header is provided in the Icy header

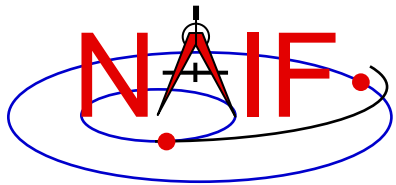


# Matlab Module Header Locations

Navigation and Ancillary Information Facility

- **Two sets of headers are provided**
  - Mice headers in HTML format:
    - » **<path to Mice>/mice/doc/html/mice/index.html**
    - » Also available using the Matlab `help` command, e.g.:

```
>> help cspice_str2et
```
  - CSPICE headers, in text and HTML formats:
    - » **<path to Mice>/mice/src/cspice/<name>\_c.c**
    - » **<path to Mice>/mice/doc/html/cspice/index.html**
- **The information provided in a “Mice” header is minimal in some cases; the corresponding CSPICE header provides more detail**
  - A link to the corresponding CSPICE header is provided in the Mice header

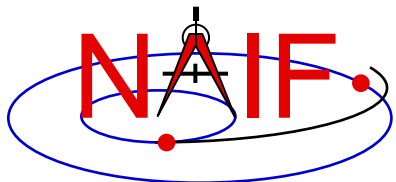

# Examine a Typical Header

Navigation and Ancillary Information Facility

- As example, look for and examine the headers for the modules named `spkezr` and `str2et`

FORTRAN	C	IDL (lcy)	MATLAB (Mice)
SPKEZR	<code>spkezr_c</code>	<code>cspice_spkezr</code>	<code>cspice_spkezr</code>
STR2ET	<code>str2et_c</code>	<code>cspice_str2et</code>	<code>cspice_str2et</code>

`spkezr` is the principal ephemeris access module  
`str2et` is a key time conversion module